


UL 标志的尺寸和要求

The minimum height of the registered trademark symbol ® shall be 3/64 of an inch. When the overall diameter of the UL Mark is less than 3/8 of an inch, the trademark symbol may be omitted if it is not legible to the naked eye.


RELATIVE DESIGN & PROPORTIONS OF THE UL MARK

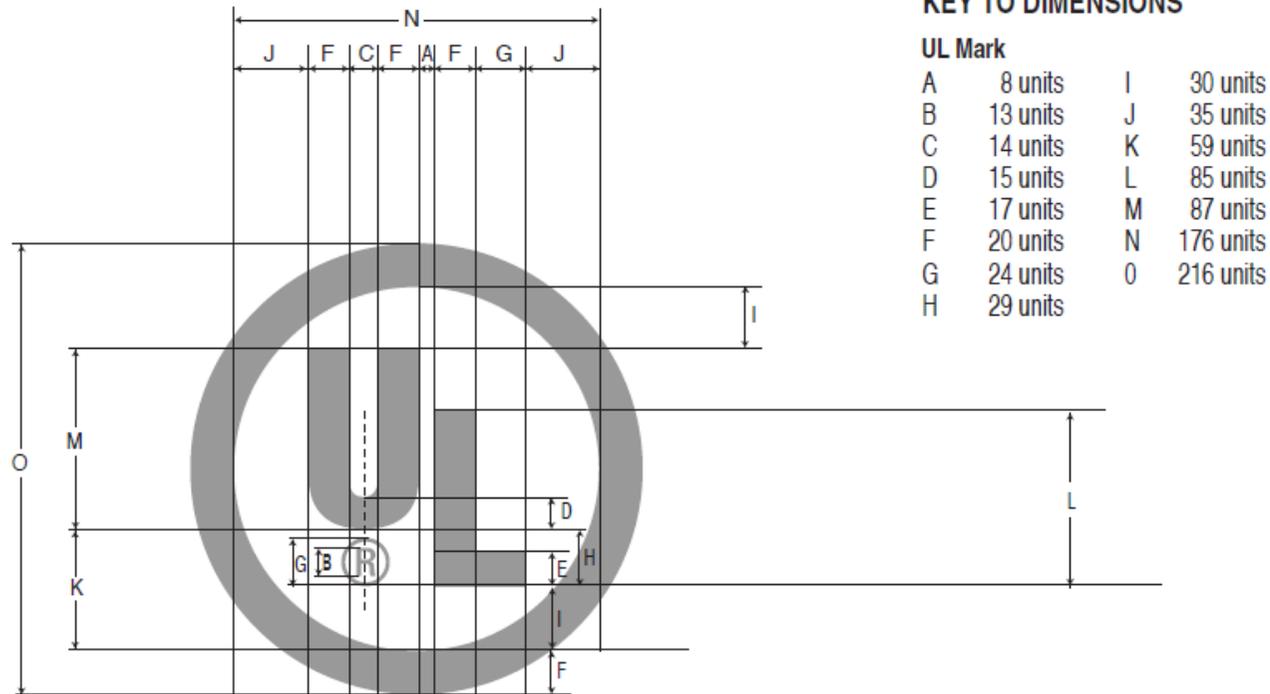

KEY TO DIMENSIONS

UL Mark


A	8 units	I	30 units
B	13 units	J	35 units
C	14 units	K	59 units
D	15 units	L	85 units
E	17 units	M	87 units
F	20 units	N	176 units
G	24 units	O	216 units
H	29 units		



Please note:


The font for all letter forms is Helvetica Condensed Black, except for the trademark symbol®, which is Helvetica Condensed Medium. No other fonts are acceptable.

ETL 标志的尺寸和要求

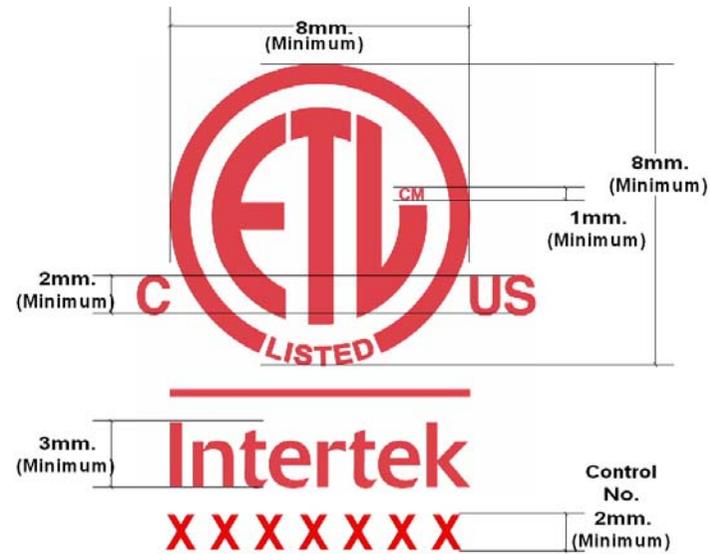


注：XXXXXX 为控制号，一个申请者和对应的一个制造商将产生一个唯一的控制号。

CE 标志的尺寸和要求

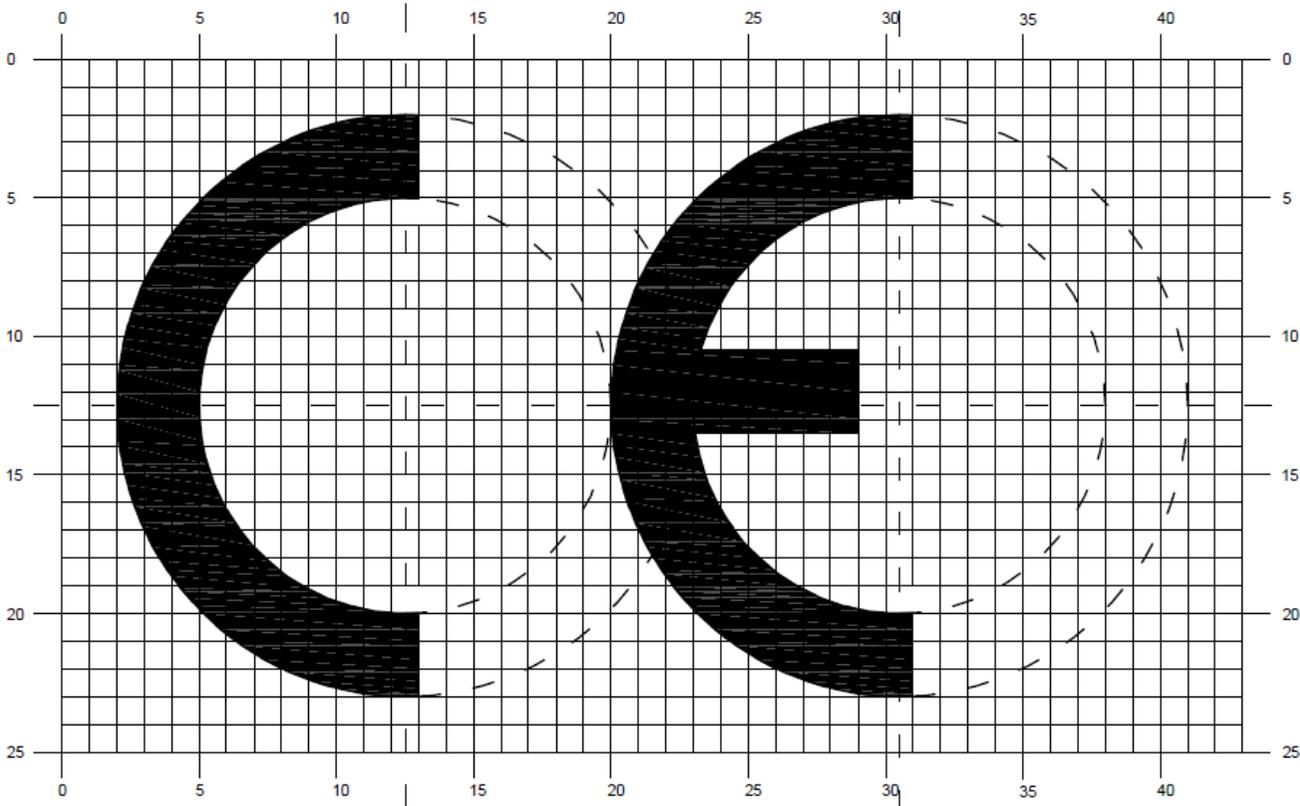

注：CE 标志的最小高度为 5mm。


CCC 标志的尺寸和要求

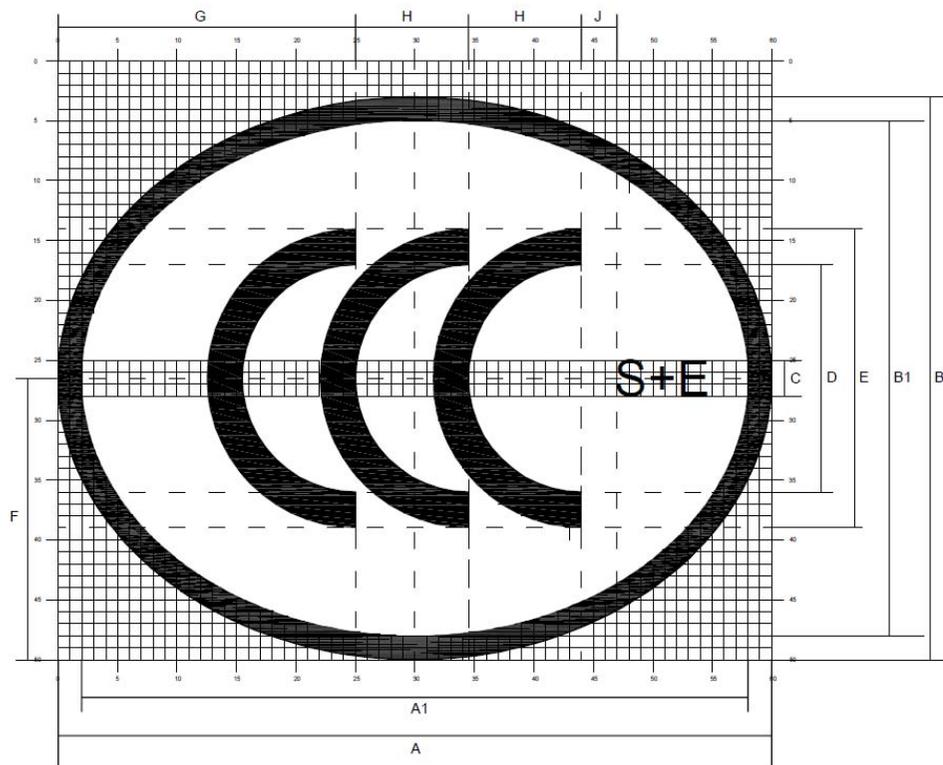

1. CCC标志主要尺寸比例单

代号	A1	A	B1	B	C	D	E	F	G	H	J				
尺寸单位	56	60	43	47	3	19	25	23.5	25	9.5	3				

WEEE 标志的尺寸和要求

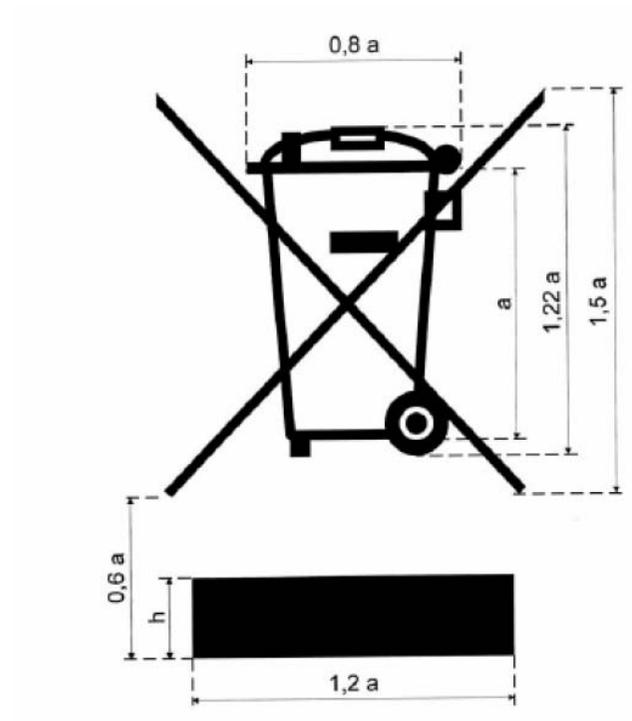

WEEE 标志要求

高度 h 须大于 $0.3a$ 或最小 1mm

TUV 南德标志




GS 标志 A



GS 标志 B



零部件认证标志



美国 NRTL 标志

其它常见符号和标志



高压警告



热表面




请勿覆盖



室内使用



接地标志



II 类电器回型标志



等电位符号